



SYNERGY MFG. 870 INDUSTRIAL WAY, SAN LUIS OBISPO, CA (805) 242-0397

8091 JK FRONT TRACK BAR RELOCATION BRACKET, RIGHT HAND DRIVE

Version 3

GENERAL NOTES:

- On Rubicon models the installation of this bracket requires some minor grinding on the diff housing, no other cutting or drilling is required.
- This bracket should be used with the PPM-8001 drag link flip kit.
- You must use a minimum of 3" of front bump stop extension, PPM-8057 (3") and PPM-8075 (4") to prevent the track bar and bracket from hitting the bottom of the frame at full jounce travel.

PARTS LIST:

8091 – JK FRONT TRACK BAR RELOCATION BRACKET, RHD


- (1) 809101 JK RHD track bar bracket
- (2) JK front track bar bracket spacers (1.50" wide)
- (1) JK front track bar bracket spacers (1.40" wide)
- (1) UB-6C-315-425
- (1) 809103-01 JK sway bar relocation tab
- (1) 809102-01 JK RHD front track bar bracket D30 U-bolt spacer
- (2) 3/8" flat washers
- (2) 3/8-16 UNC Nylock nuts
- (1) 9/16-18 UNF x 3" long hex head bolt
- (2) 9/16" flat washer
- (1) 9/16-18 UNF Stover nut
- (2) 1/2-13 UNC x 3" long hex head bolt
- (2) 1/2" flat washer
- (2) 1/2-13 UNC stover nut

Parts / Tools Needed to complete installation:


- Basic simple hand tools.
- 4-1/2" angle grinder or similar metal cutting tool with cut off wheel and grinding disc. See step 6.

APPROXIMATE INSTALL TIME: 1-2 HOURS


1. Remove the factory front track bar from the axle bracket and loosen the track bar from the frame bracket to allow the track bar to rotate out of the way. Secure the track bar up and out of the way with a bungee cord or something similar. Also remove the steering stabilizer.
2. Remove the factory anti-sway bar links from the axle brackets, or remove completely if using new anti-sway bar links.
3. Position the new PPM-8091 track bar bracket over the stock track bar bracket as shown below. Secure the bracket to the sway bar tab using the supplied 1/2 x 3" bolt and spacer. There are 3 cylindrical spacers included with this kit, use one of the longer 1.5" (38mm) ones for this step. Use a washer under the head of the bolt and under the toplock nut. Do not tighten any of the track bar bracket hardware until all of the hardware is installed.

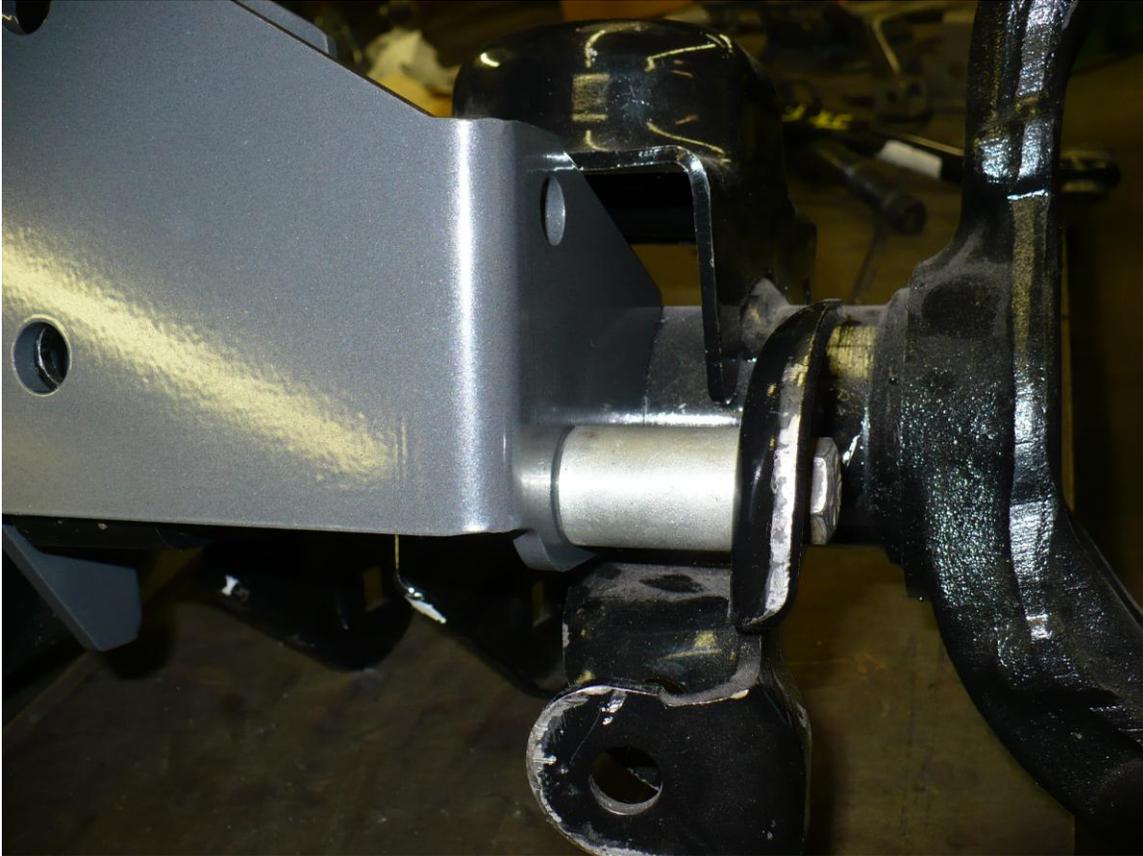

4. Insert the shortest of the 3 spacers where the stock track bar bushing was. Install the 9/16 x 3" bolt in the track bar relocation bracket through the stock track bar mounting hole. Use a flat washer under the bolt head and under the lock nut.

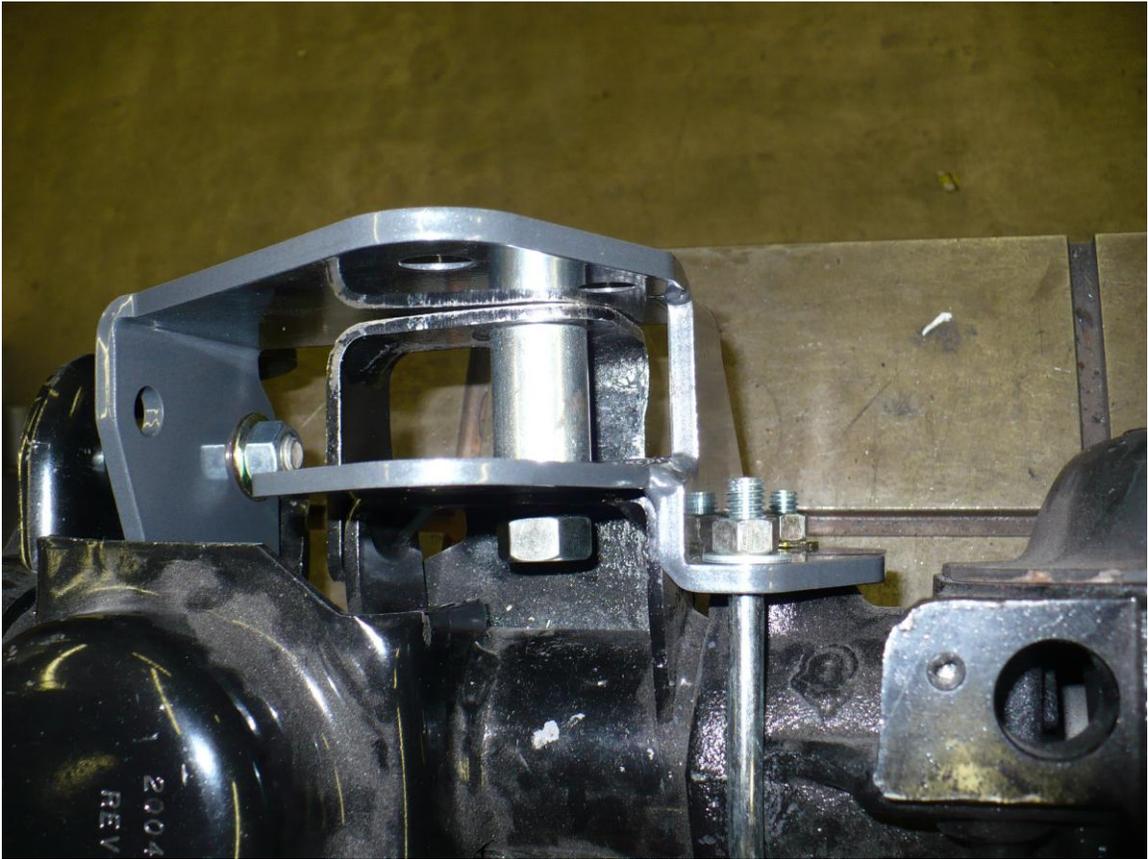


5. If you have a Dana 30, use the supplied shim between the housing and the track bar relocation bracket. Install the u-bolt over the diff housing and through the track bar relocation bracket, use a flat washer and nylock nut to secure the u-bolt.

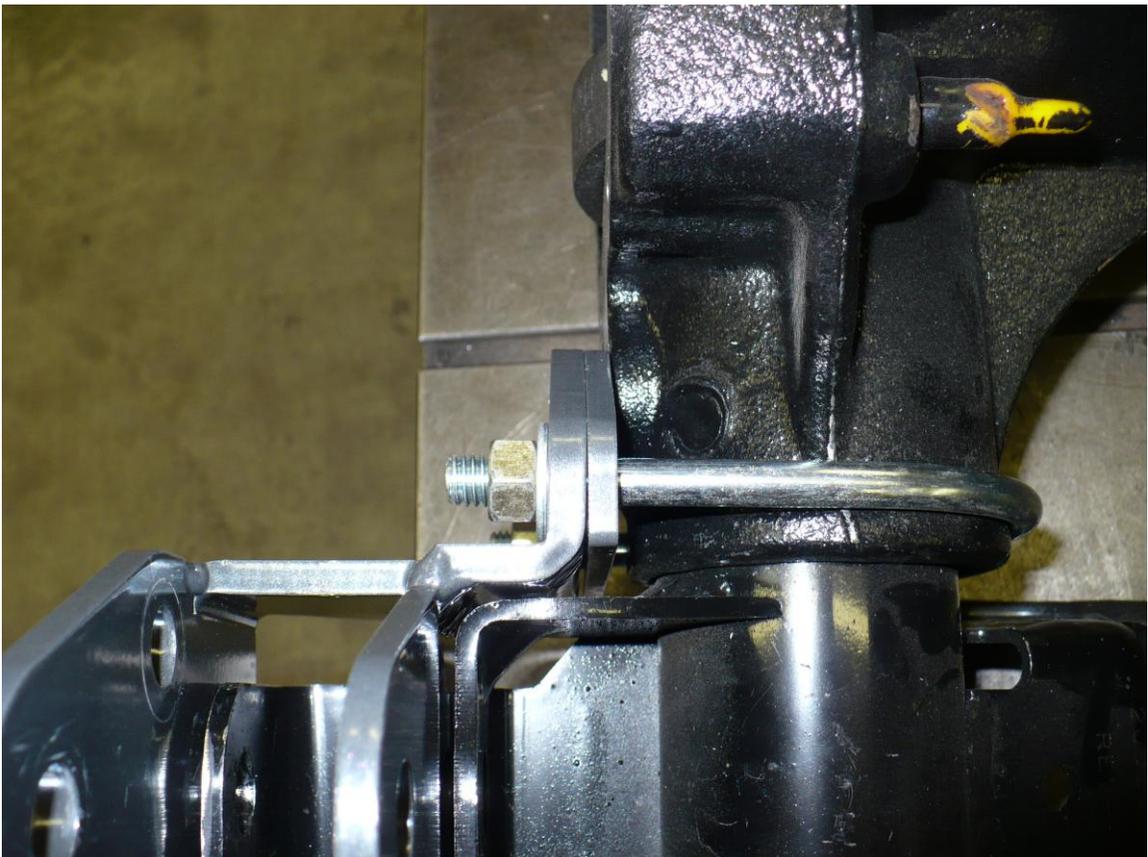


6. If you have a Rubicon with a Dana 44, you will have to grind the bottom web slightly to clear the u-bolt. Do not use the shim. Install the u-bolt over the axle housing and through the track bar relocation bracket, use a flat washer and nylock nut to secure the u-bolt.




7. Once all the hardware is installed in the track bar relocation bracket you can begin to torque all the hardware. Torque the 9/16 bolt to 150 ft-lbs (200 N-m), the 1/2" bolt to 90 ft-lbs (120 N-m), and the 3/8" U-bolt nuts to 30 ft-lbs (40 N-m).
8. The anti-sway bar relocation bracket works in conjunction with the track bar relocation bracket to raise the anti-sway bar mounts by 2". This is required when using the 8079 sway bar disconnect kit and/or using the 8059 sway bar link kit. If you are relocating the anti-sway bar link mounts refer to step 9 & 10. If you want to keep the anti-sway bar links in the stock location, skip step 9&10 and refer to step 11.
9. Attach the passenger side sway bar link to the upper hole in the track bar relocation bracket using the stock bolt and nut.

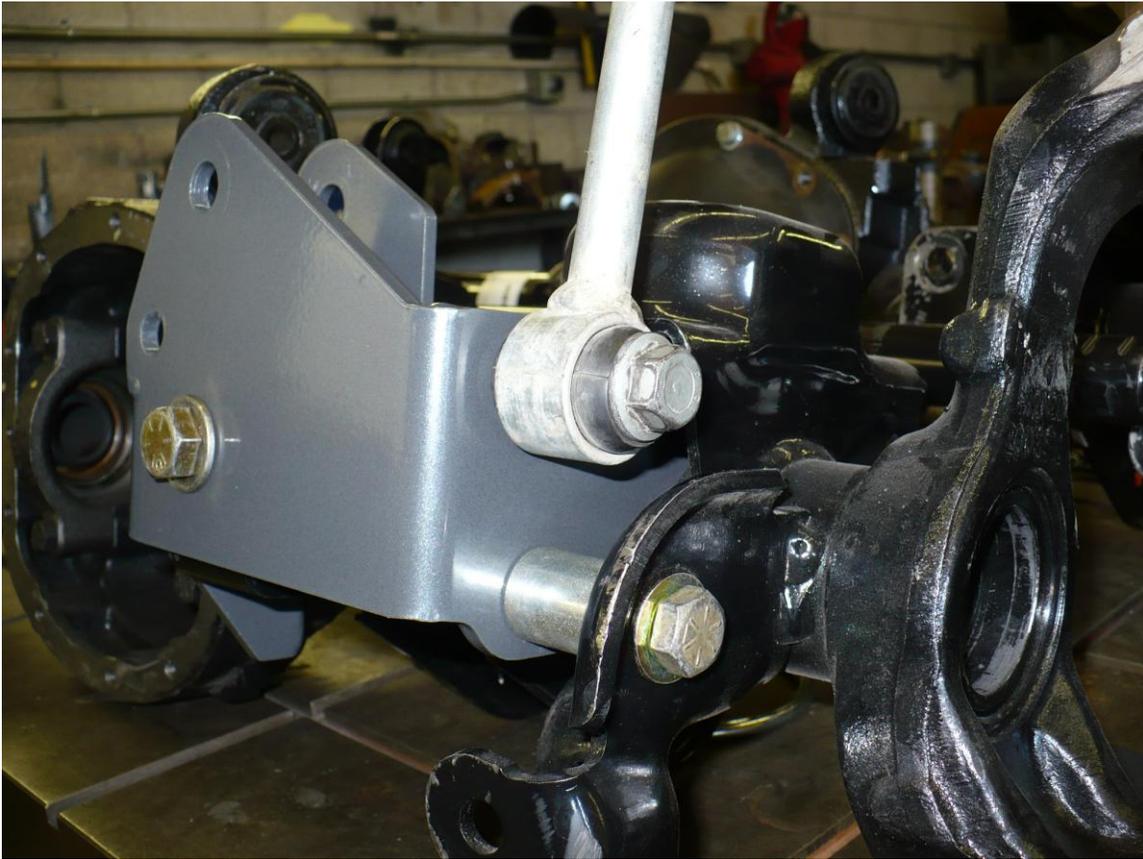


10. Install the driver side anti-sway bar relocation bracket using a 1.5" (38 mm) spacer and $\frac{1}{2}$ " x 3" bolt and top-lock nut; use a washer under the bolt-head and nut. Tighten the $\frac{1}{2}$ " bolt to 90 ft-lbs (120 N-m), and the sway bar link bolts to 90 ft-lbs (120 N-m).

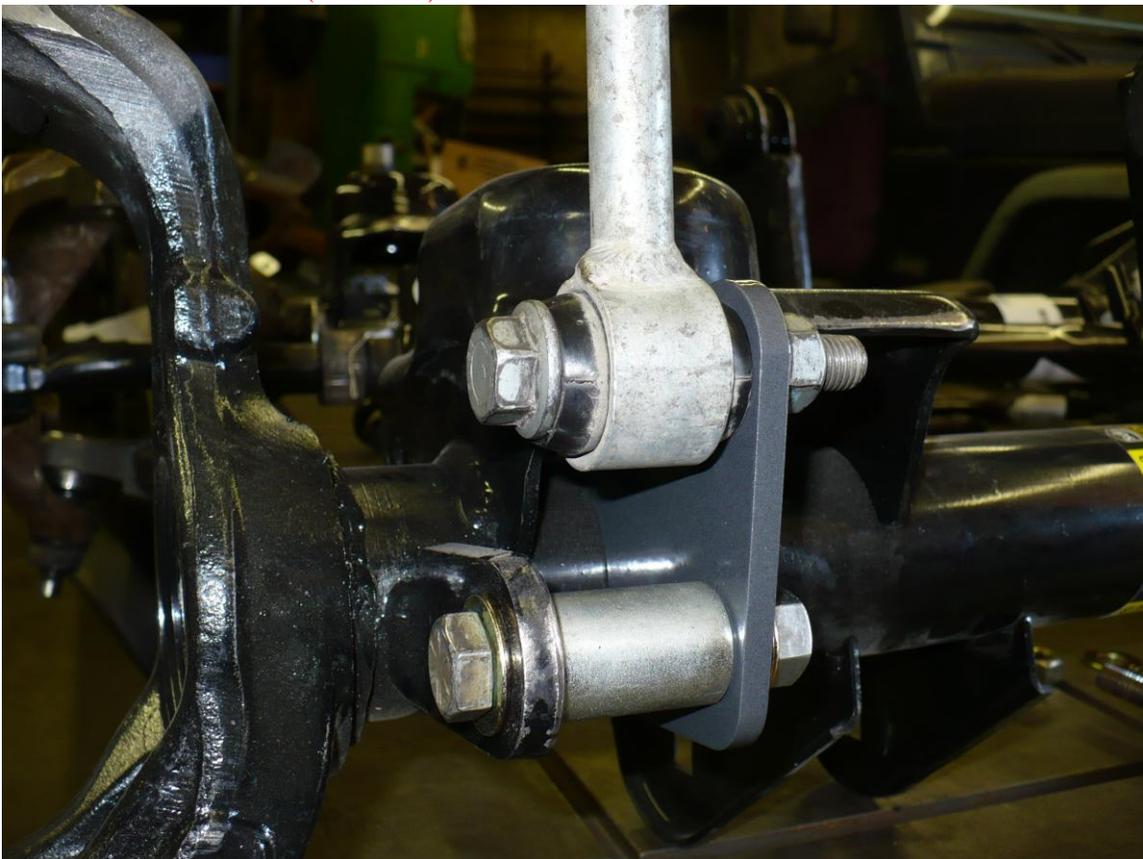

11. If you are not using the anti-sway bar relocation brackets and want to mount the sway bar links in the factory location, install the passenger side anti sway bar link between the track bar bracket and factory sway bar tab as shown below. Attach the driver side anti-sway bar link in the factory location.

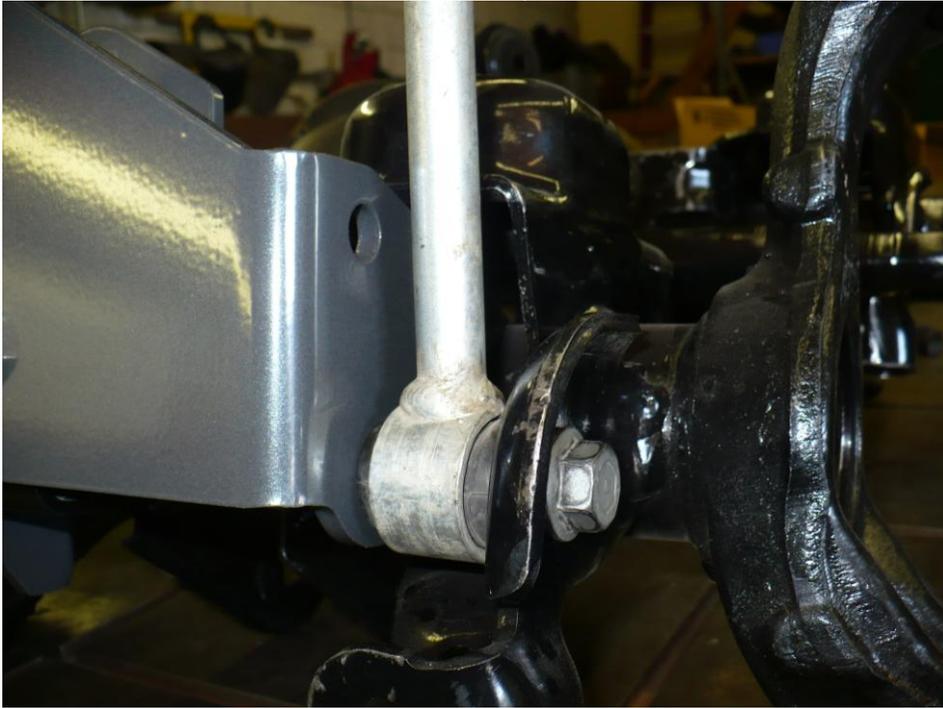

12. Install the steering stabilizer to the track bar relocation bracket. Attach the body end of the steering stabilizer to the track bar relocation bracket using the factory nut and bolt.
13. Loosen the clamping bolt on the tie rod steering stabilizer bracket and rotate it to the top of the tie rod, fully compress the steering stabilizer and turn the wheels all the way to the left. Attach the steering stabilizer to the tie rod bracket.

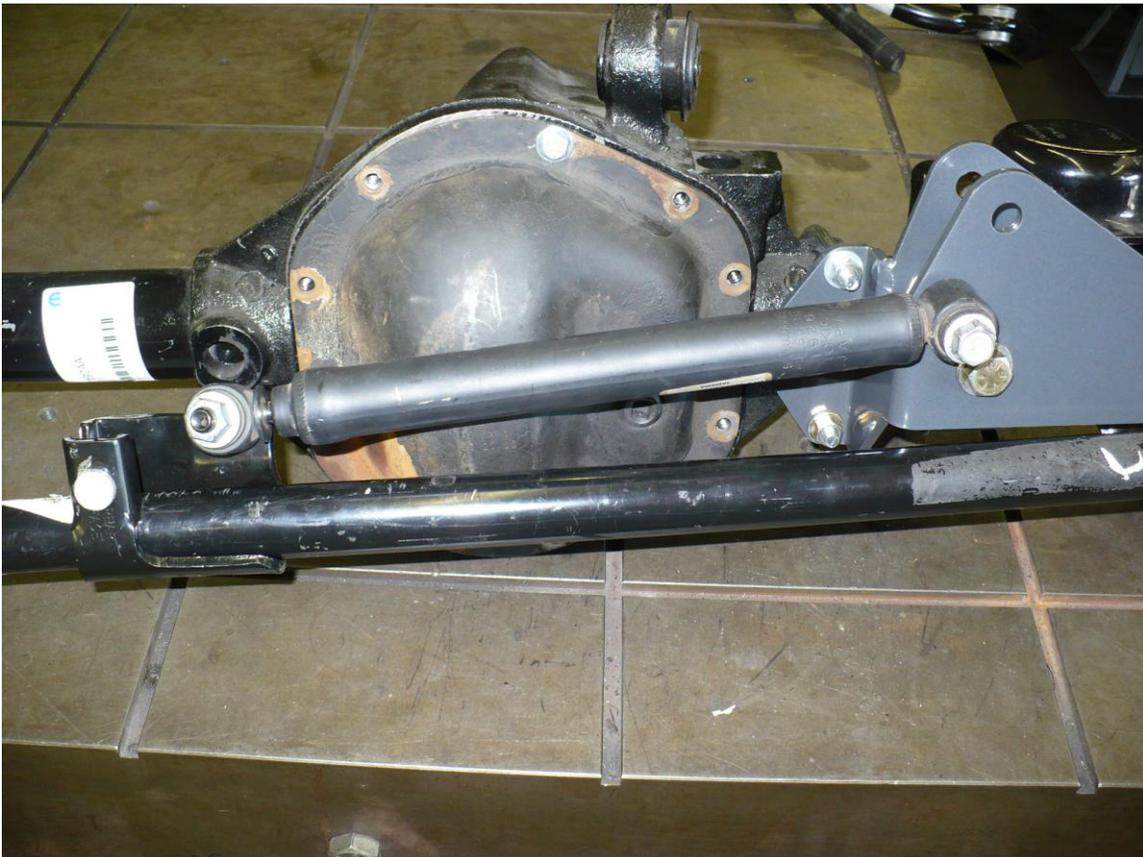

14. Rotate the tie rod clamp forward enough that the steering stabilizer clears the diff cover. Turn the tires all the way to both sides to verify clearance and that the steering stabilizer does not limit the steering angle. When the tie rod clamp is positioned correctly, tighten the clamping bolt.



15. Reattach the track bar using the factory nut and bolt, it helps to have someone turn the steering wheel to align the track bar to the hole in the bracket. Torque the factory track bar bolts to 125 ft-lbs (170 N-m). Remember to tighten the track bar frame mount bolt if you loosened it earlier.
16. You will probably have to re-center the steering wheel. Adjust the draglink to center the steering wheel. If the steering wheel is not centered the ESP light will come on, so make sure you adjust the draglink so the steering wheel is perfectly centered. This can be accomplished by test driving and making the necessary adjustments. When driving in a straight line take note of which way the steering wheel need to turn to be centered. If the steering wheel needs to turn right to be centered, shorten the draglink. If the steering wheel needs to turn left to be centered, lengthen the draglink.
17. Installation is complete.